CONSTRUCTION PLAN NOTES:

1. AT ALL LOCATIONS OF PROPOSED CURB WHERE THE ADJACENT EXISTING PAVEMENT WILL REMAIN, THE CONTRACTOR SHALL SAWCUT THE EXISTING PAVEMENT, FULL DEPTH, AT A LOCATION TWO FEET OFF THE PROPOSED CURB FACE. THE REPAIR STRIP SHALL BE BACKFILLED WITH DENSE GRADED AGGREGATE AND HMA IN ACCORDANCE WITH THE DETAILS. ALL BACKFILL MATERIALS WILL BE PAID FOR UNDER THEIR RESPECTIVE BID ITEMS. ANY SAWCUTTING REQUIRED SHALL BE INCLUDED IN THE PRICE BID FOR CURB.
2. CONTRACTOR WILL BE PROVIDED WITH ELECTRONIC AUTOCADD DRAWING OF PROPOSED PLANS BEFORE CONSTRUCTION BEGINS. CONTROL POINTS WILL BE PROVIDED BY THE ENGINEER FOR LAYOUT PURPOSES.
3. THE CONTRACTOR SHALL FIELD VERIFY ALL GRADES, DIMENSIONS, UTILITIES AND SITE AMENITIES BEFORE CONSTRUCTION COMMENCES AND PROVIDE RECORD TO THE ENGINEER. ANY DISCREPANCIES OR APPARENT CONFLICTS SHALL BE BROUGHT TO THE ENGINEERS ATTENTION FOR INTERPRETATION. CONTRACTORS ARE ADVISED TO CALL FOR A UTILITY MARKOUT BEFORE COMMENCING CONSTRUCTION.
4. ESTIMATED QUANTITIES HAVE BEEN PROVIDED BY THE ENGINEER FOR ITEMS SHOWN ON THE PLANS FOR THE CONTRACTOR'S USE. THE CONTRACTOR SHALL VERIFY THE QUANTITIES AND ASSUME ALL RESPONSIBILITIES TO COMPLETELY CONSTRUCT THE PROJECT AS SHOWN ON THE PLANS. THE ENGINEER IS NOT RESPONSIBLE FOR ANY DISCREPANCIES IN THE QUANTITIES.

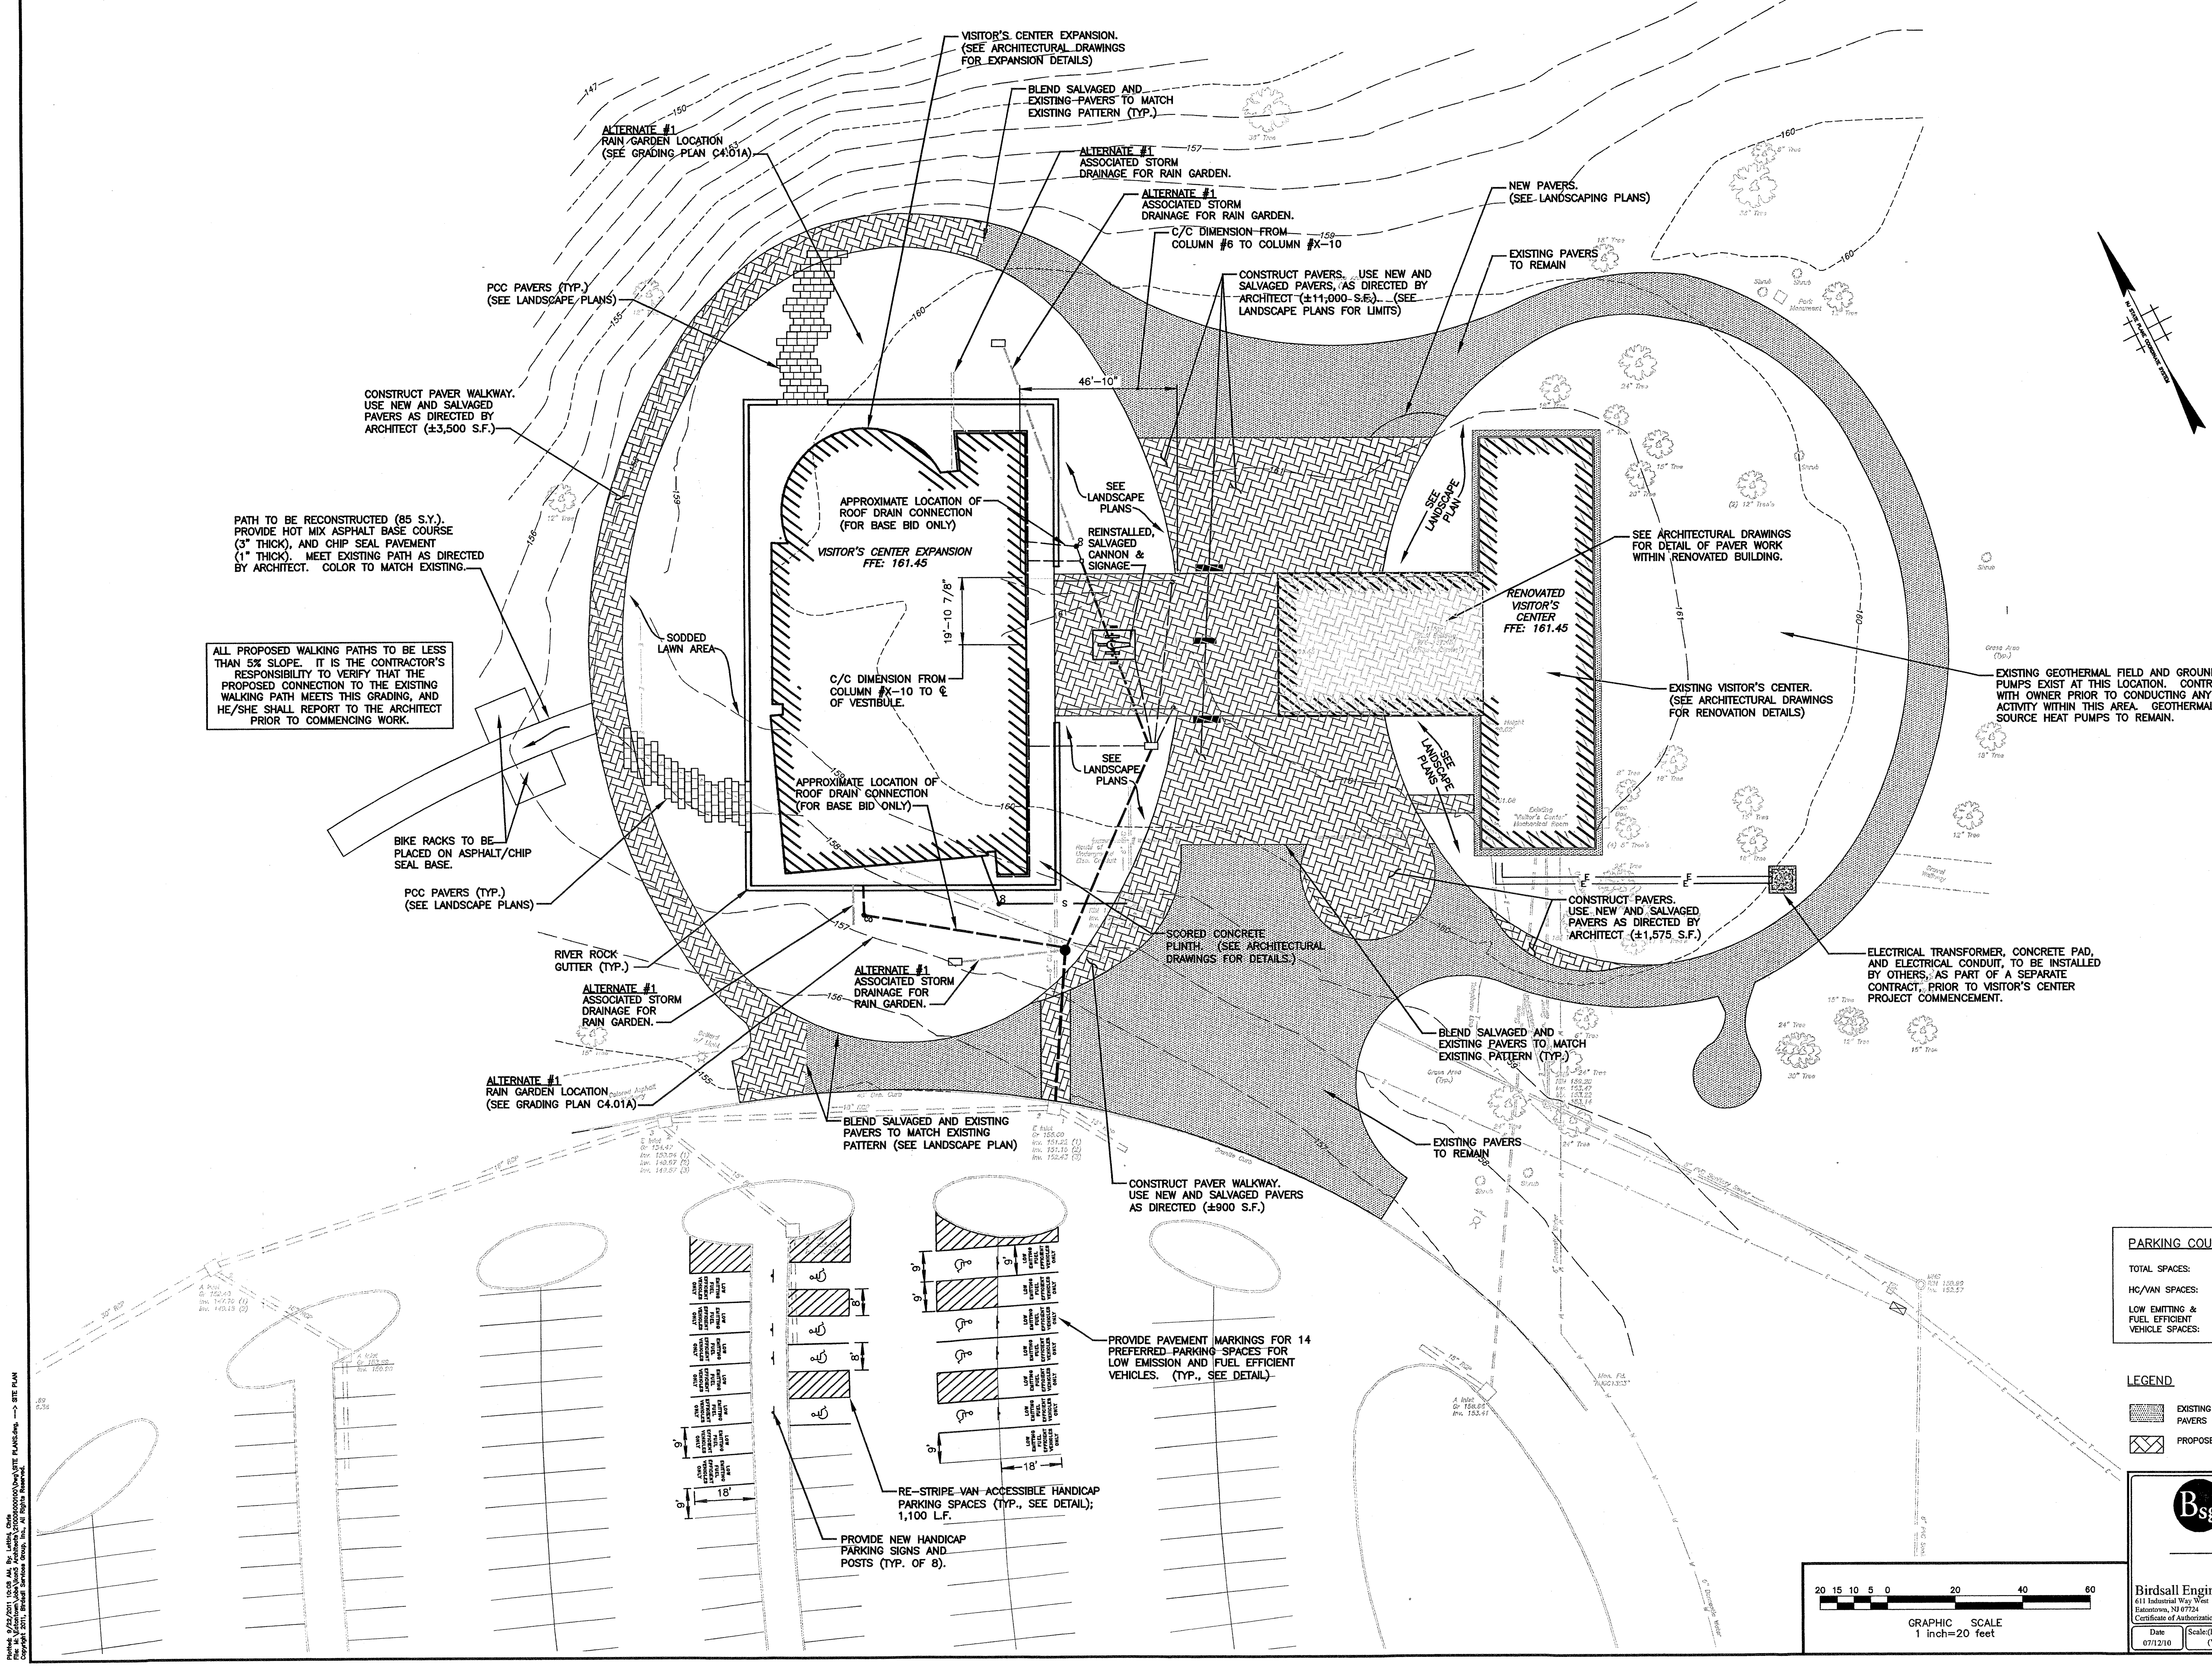

GRAPHIC SCALE
1 inch=20 feet

PARKING COUNT

TOTAL SPACES:	257
HC/VAN SPACES:	8
LOW EMITTING & FUEL EFFICIENT VEHICLE SPACES:	14

LEGEND

- EXISTING BRICK PAVERS (TO REMAIN)
- PROPOSED PAVERS

GENERAL LEGEND

Existing / PROPOSED

CURB LINE
DEPRESSED CURB
EDGE OF PAVEMENT
CONCRETE
CHAIN LINK FENCE
POST & RAIL FENCE
GUIDE RAIL
CONTOURS
MINOR
MAJOR
ELECTRIC LINE
TELEPHONE
CABLE TELEVISION
WATER MAIN
GAS MAIN
SANITARY SEWER
STORM DRAIN
SEWER OR STORM MANHOLE
RECONSTRUCT & RESET MANHOLE
INLET TYPE 'A'
INLET TYPE 'B' OR 'E'
RECONSTRUCT & RESET INLET
CONCRETE HEADWALL
FLARED END SECTION
WATER VALVE & METER
WATER VALVE & METER RESET
FIRE HYDRANT
GAS VALVE & METER
SEWER OR STORM CLEANOUT
UTILITY POLE & GUY ANCHOR
LIGHT POLES
TRAFFIC SIGNAL POLE
GENERAL SIGNS
TREES
TREE LINES
SURVEY POINTS
PROPERTY MONUMENTS
INLET PROTECTION
LIMIT OF DISTURBANCE
SILT FENCE
SOIL DISTURBANCE
CONSTRUCTION ENTRANCE

TOTAL PROJECT DISTURBANCE = 1.35 ACRES
TOTAL SOIL DISTURBANCE = 1.35 ACRES

BIRDSALL SERVICES GROUP
ENGINEERS & CONSULTANTS

THOMAS K. ROSPOS, P.E.
NJ PROFESSIONAL ENGINEER Lic. No. 24GE02702800
DATE:

Birdsall Engineering, Inc.
611 Industrial Way West
Eatontown, NJ 07724
Certificate of Authorization No. 24GA27989800
Tel.: 732.380.1700
Fax: 732.380.1701
WWW.BIRDSALL.COM

Date	Scale(H) 1"=20' (V)	Drawn	Designed	Checked	Released
07/12/10			CJL		

VERSIONS

No.	Date	Description
	10-03-2011	Bid Documents

ikon.5 architects
Architecture
Planning
Research
Strategy

864 Mapleton Road
Princeton, NJ 08540
609.919.0099
fax 609.919.0088
www.ikon5architects.com

Professional License Number

PROJECT TITLE:
VISITORS CENTER RENOVATION AND EXPANSION
MONMOUTH BATTLEFIELD STATE PARK

MANALAPAN, NEW JERSEY

PROJECT NO.: P1035.00

SHEET TITLE:
SITE PLAN

DATE: 10-03-2011
DRAWN BY: CJL
DRAWING NO.:

C3.01