Plotted: 8/22/2011 10:17 AM, By: Lettini, Chris
Copyright 2011, Birdsall Services Group, Inc., All Rights Reserved.

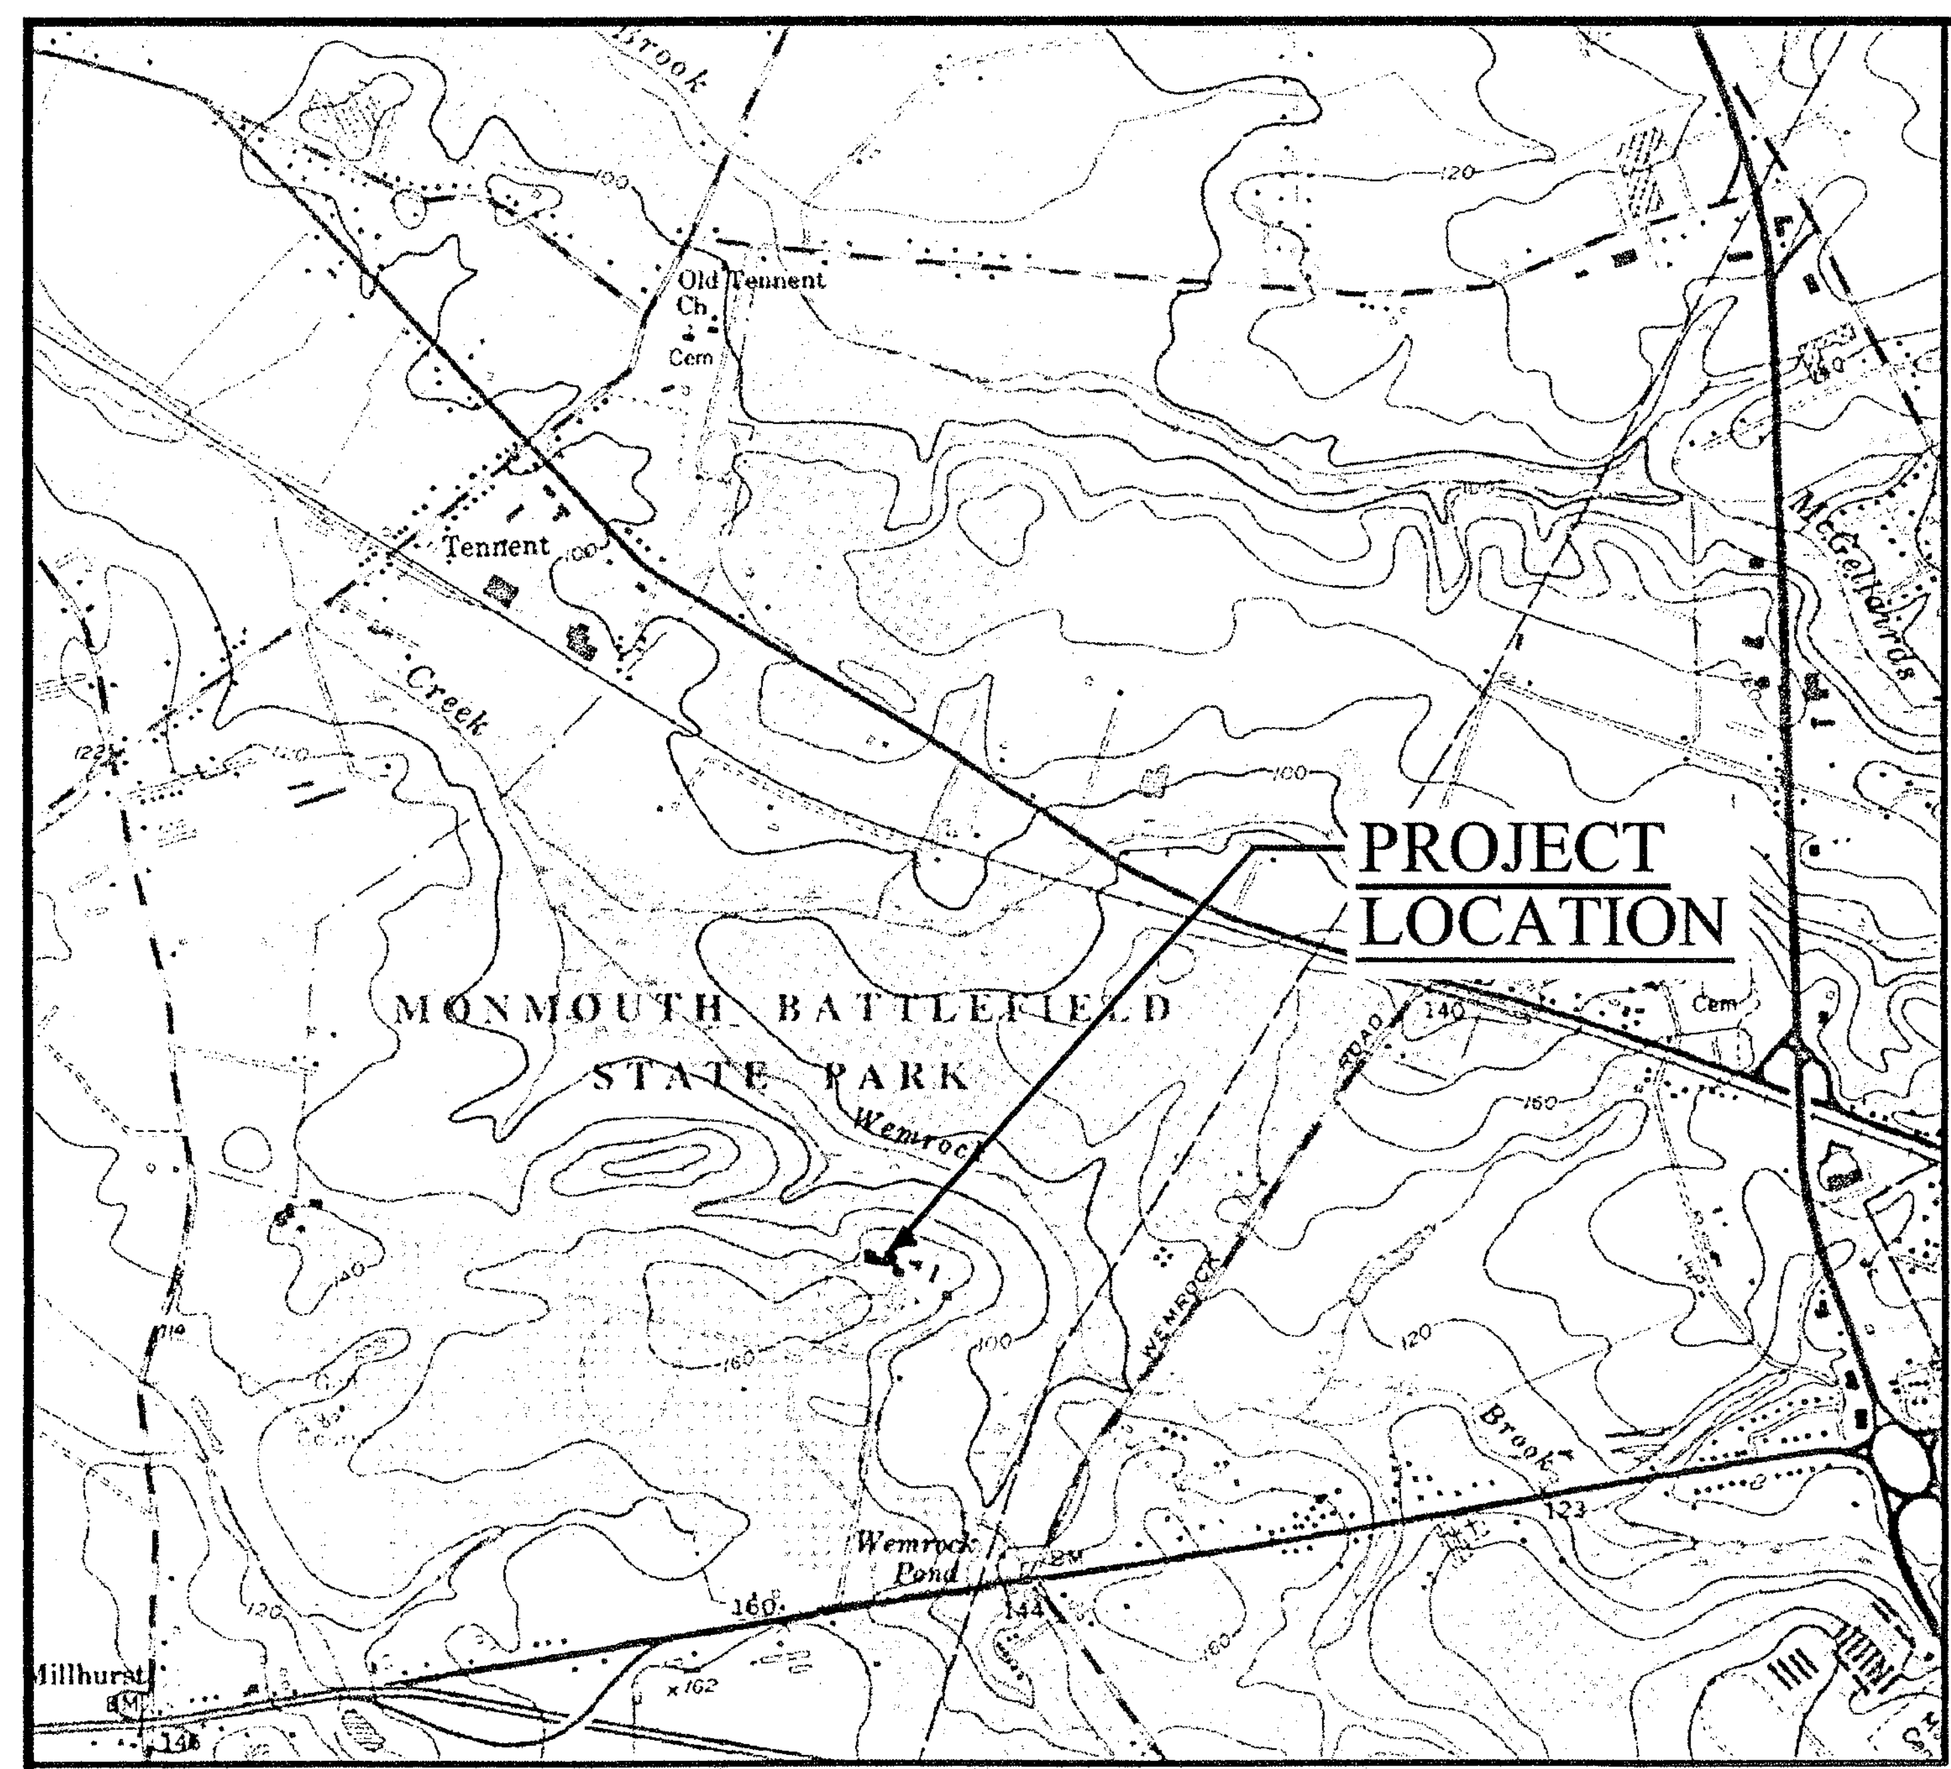

KEY MAP

SCALE: 1" = 2,000'

PORTION OF US QUADRANGLE MAP
LOCATION: FREEHOLD

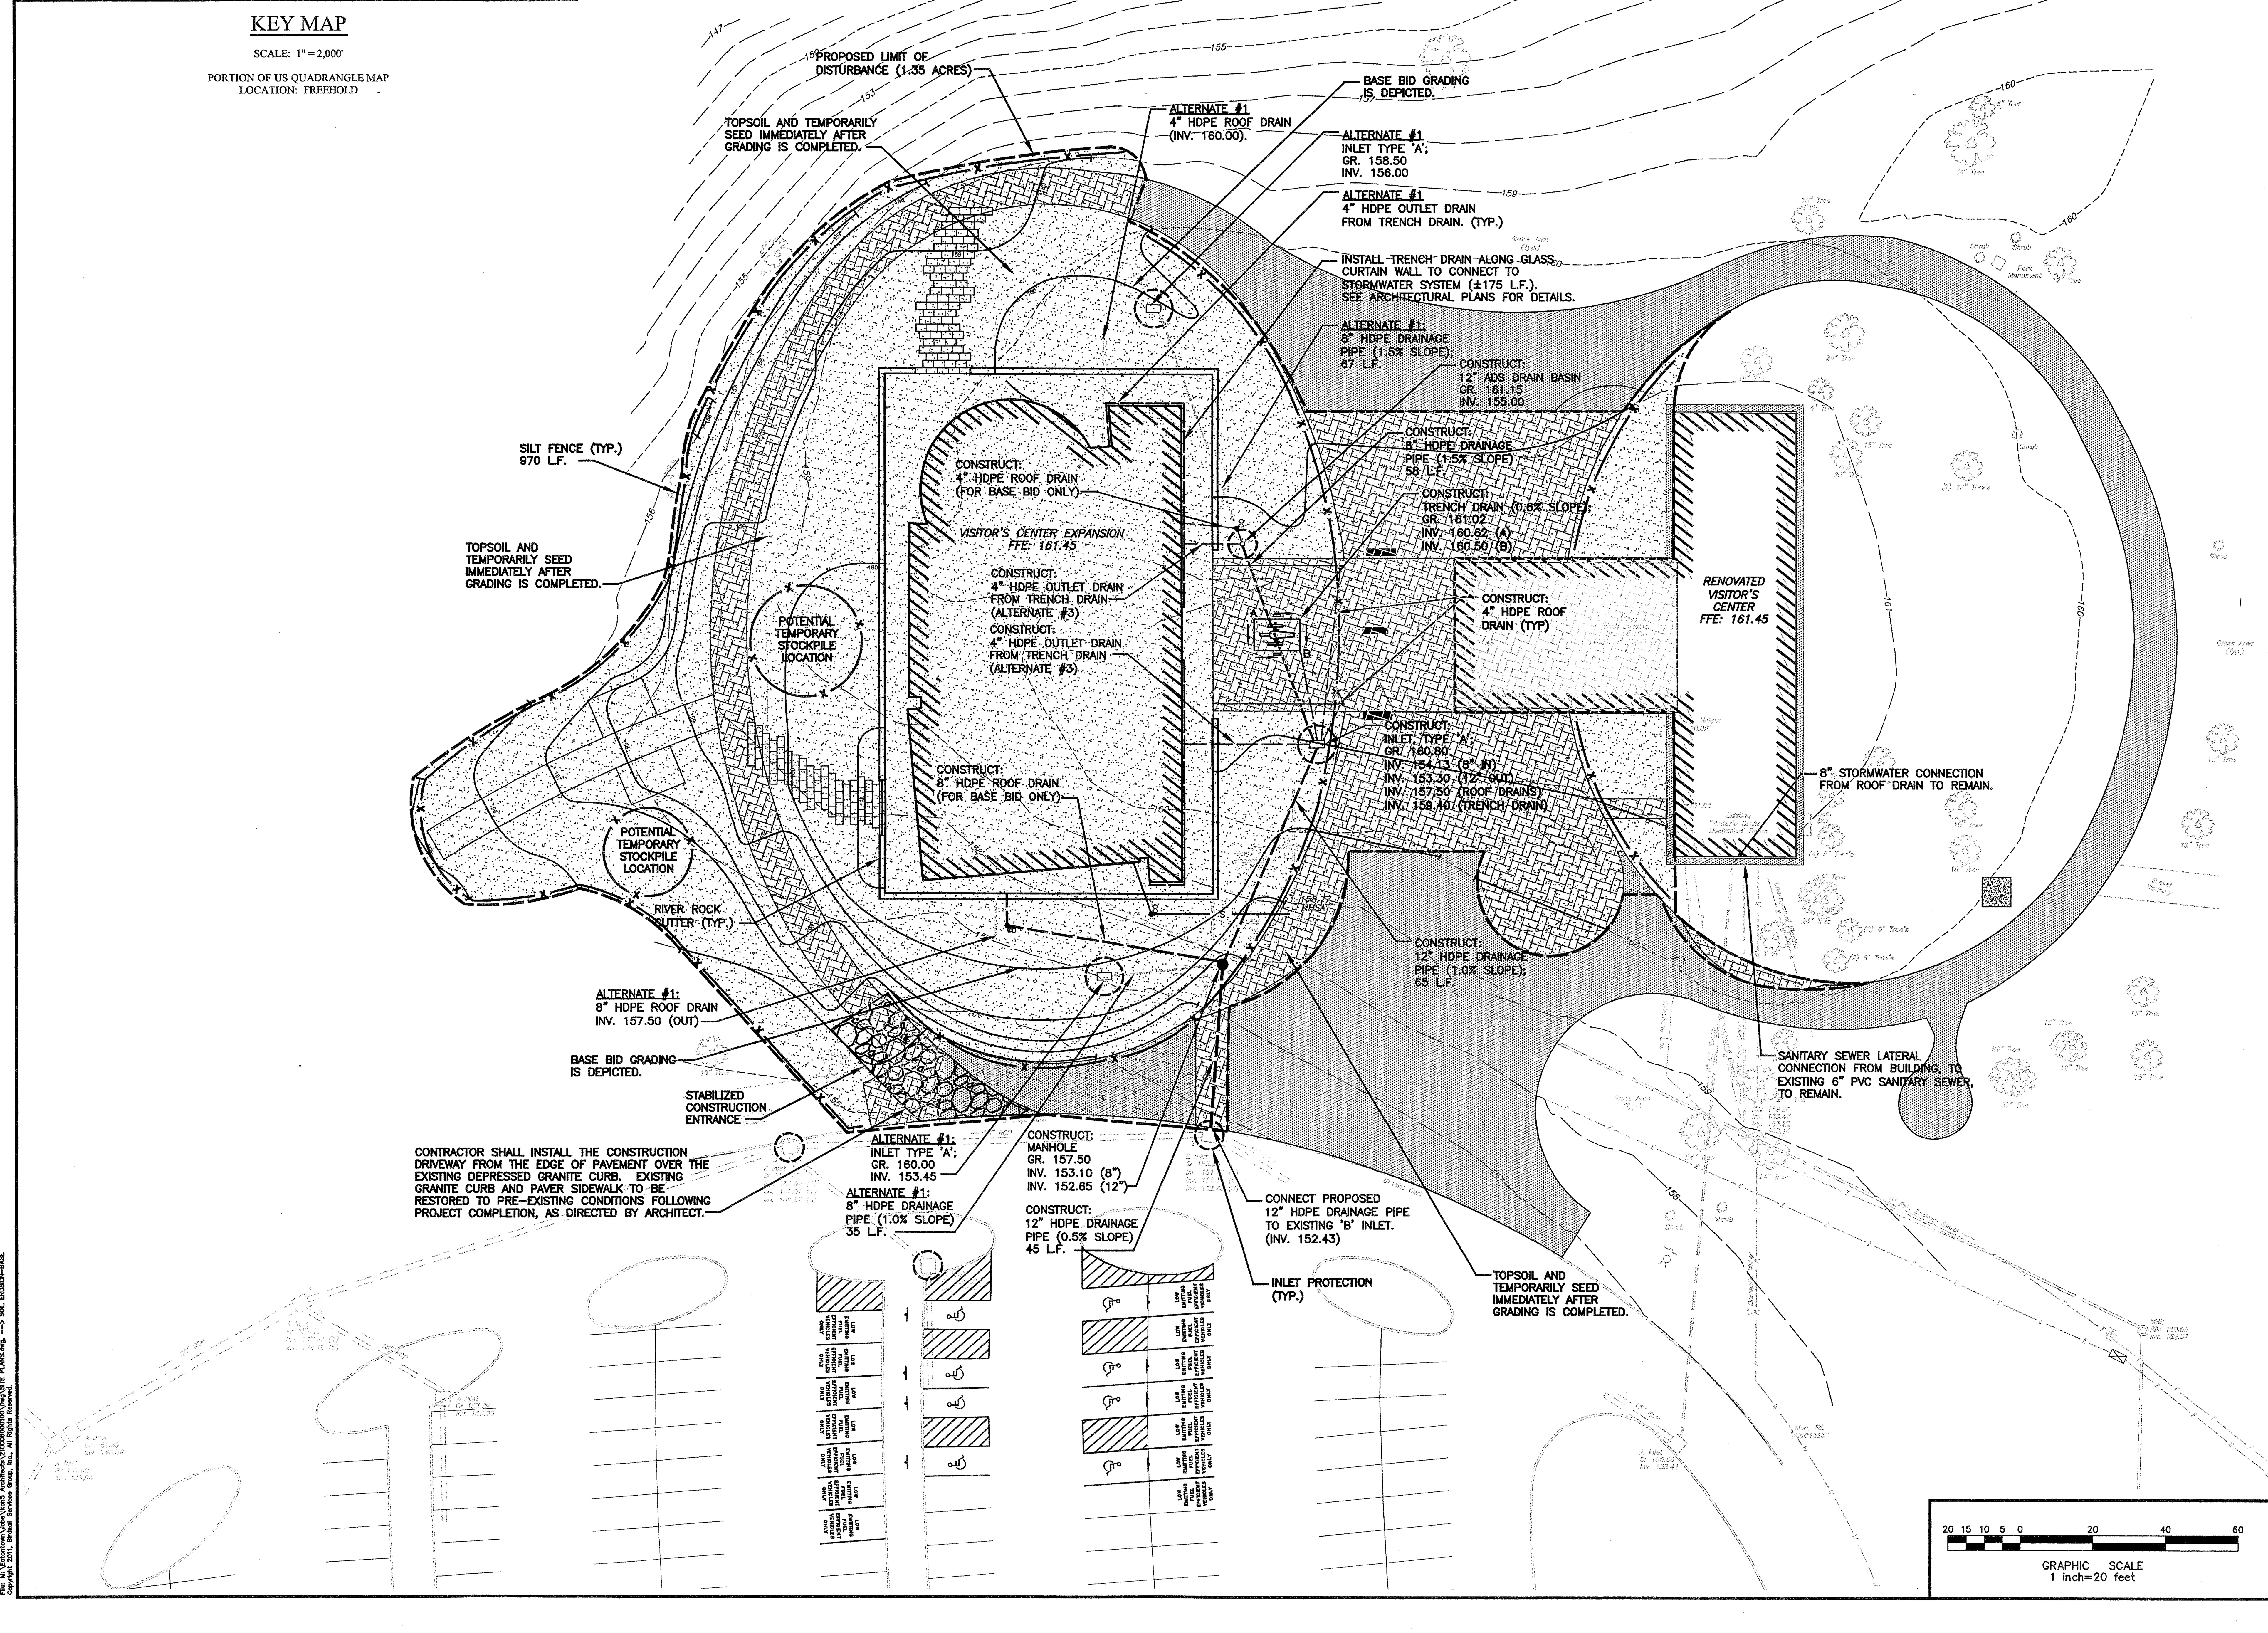

GRAPHIC SCALE
1 inch=20 feet
(0 5 10 15 20 — 20 — 40 — 60)

SOIL EROSION & SEDIMENT CONTROL PLAN NOTES:

1. ALL SOIL EROSION CONTROL MEASURES SHALL FOLLOW THE STANDARDS OF THE LOCAL SOIL CONSERVATION DISTRICT AS SHOWN AND DETAILED ON THE EROSION CONTROL DETAILS ON A SEPARATE SHEET.
2. CONTRACTOR SHALL INSTALL THE CONSTRUCTION DRIVEWAY AT THE LOCATION SHOWN ON THE PLAN FROM THE END OF THE EDGE OF PAVEMENT OVER THE EXISTING DEPRESSED GRANITE CURB. EXISTING GRANITE CURB AND PAVER SIDEWALK TO BE REPLACED TO PRE-EXISTING CONDITIONS FOLLOWING PROJECT COMPLETION, IF DAMAGED, AT NO ADDITIONAL COST TO THE OWNER.
3. THE STOCKPILE AREA SHALL BE DESIGNATED BY AN ADDITIONAL ROW OF SILT FENCE AROUND THE PILE TO INSURE THAT NO SOIL LEAVES THE SITE.
4. ESTIMATED QUANTITIES HAVE BEEN PROVIDED BY THE ENGINEER FOR ITEMS SHOWN ON THE PLANS FOR THE CONTRACTOR'S USE. THE CONTRACTOR SHALL VERIFY THE QUANTITIES AND ASSUME ALL RESPONSIBILITIES TO COMPLETELY CONSTRUCT THE PROJECT AS SHOWN ON THE PLANS. THE ENGINEER IS NOT RESPONSIBLE FOR ANY DISCREPANCIES IN THE QUANTITIES.

VERSIONS

No.	Date	Description
	10-03-2011	Bid Documents

GENERAL LEGEND

Existing		PROPOSED
	CURB LINE	
	DEPRESSED CURB	
	EDGE OF PAVEMENT	
	CONCRETE	
	CHAIN LINK FENCE	
	POST & RAIL FENCE	
	GUIDE RAIL	
	CONTOURS	
1	MINOR	1
5	MAJOR	5
E	ELECTRIC LINE	E
T	TELEPHONE	T
CATV	CABLE TELEVISION	CATV
W	WATER MAIN	W
G	GAS MAIN	G
	SANITARY SEWER	
	STORM DRAIN	
	SEWER OR STORM MANHOLE	
	RECONSTRUCT & RESET MANHOLE	
	INLET TYPE 'A'	
	INLET TYPE 'B' OR 'E'	
	RECONSTRUCT & RESET INLET	
	CONCRETE HEADWALL	
	FLARED END SECTION	
	WATER VALVE & METER	
	WATER VALVE & METER RESET	
	FIRE HYDRANT	
	GAS VALVE & METER	
CO	SEWER OR STORM CLEANOUT	CO
	UTILITY POLE & GUY ANCHOR	
	LIGHT POLES	
	TRAFFIC SIGNAL POLE	
	GENERAL SIGNS	
	TREES	
	TREE LINES	
	SURVEY POINTS	
	PROPERTY MONUMENTS	M
	INLET PROTECTION	
	LIMIT OF DISTURBANCE	
	SILT FENCE	
	SOIL DISTURBANCE	
	CONSTRUCTION ENTRANCE	

TOTAL PROJECT DISTURBANCE = 1.35 ACRES
TOTAL SOIL DISTURBANCE = 1.35 ACRES

BIRDSALL SERVICES GROUP
ENGINEERS & CONSULTANTS

DATE:
THOMAS K. ROSPOS, P.E.
NJ PROFESSIONAL ENGINEER Lic. No. 24GE02702800

Birdsall Engineering, Inc.
611 Industrial Way West
Eatontown, NJ 07724
Certificate of Authorization No. 24GA27989800
Tel.: 732.380.1700
Fax.: 732.380.1701
WWW.BIRDSALL.COM

Date	Scale:(H) 1"=20' (V)	Drawn	Designed	Checked	Released
07/12/10			CJL		

ikon.5 architects
Architecture
Planning
Research
Strategy

864 Mapleton Road
Princeton, NJ 08540
609.919.0099
fax 609.919.0088
www.ikon5architects.com

Professional License Number

PROJECT TITLE:
VISITORS CENTER RENOVATION AND EXPANSION
MONMOUTH BATTLEFIELD STATE PARK

MANALAPAN, NEW JERSEY
PROJECT NO.: P1035.00

SHEET TITLE:
SOIL EROSION & SEDIMENT CONTROL PLAN (BASE)

DATE: 10-03-2011
DRAWN BY: CJL
DRAWING NO.:
SE1.01