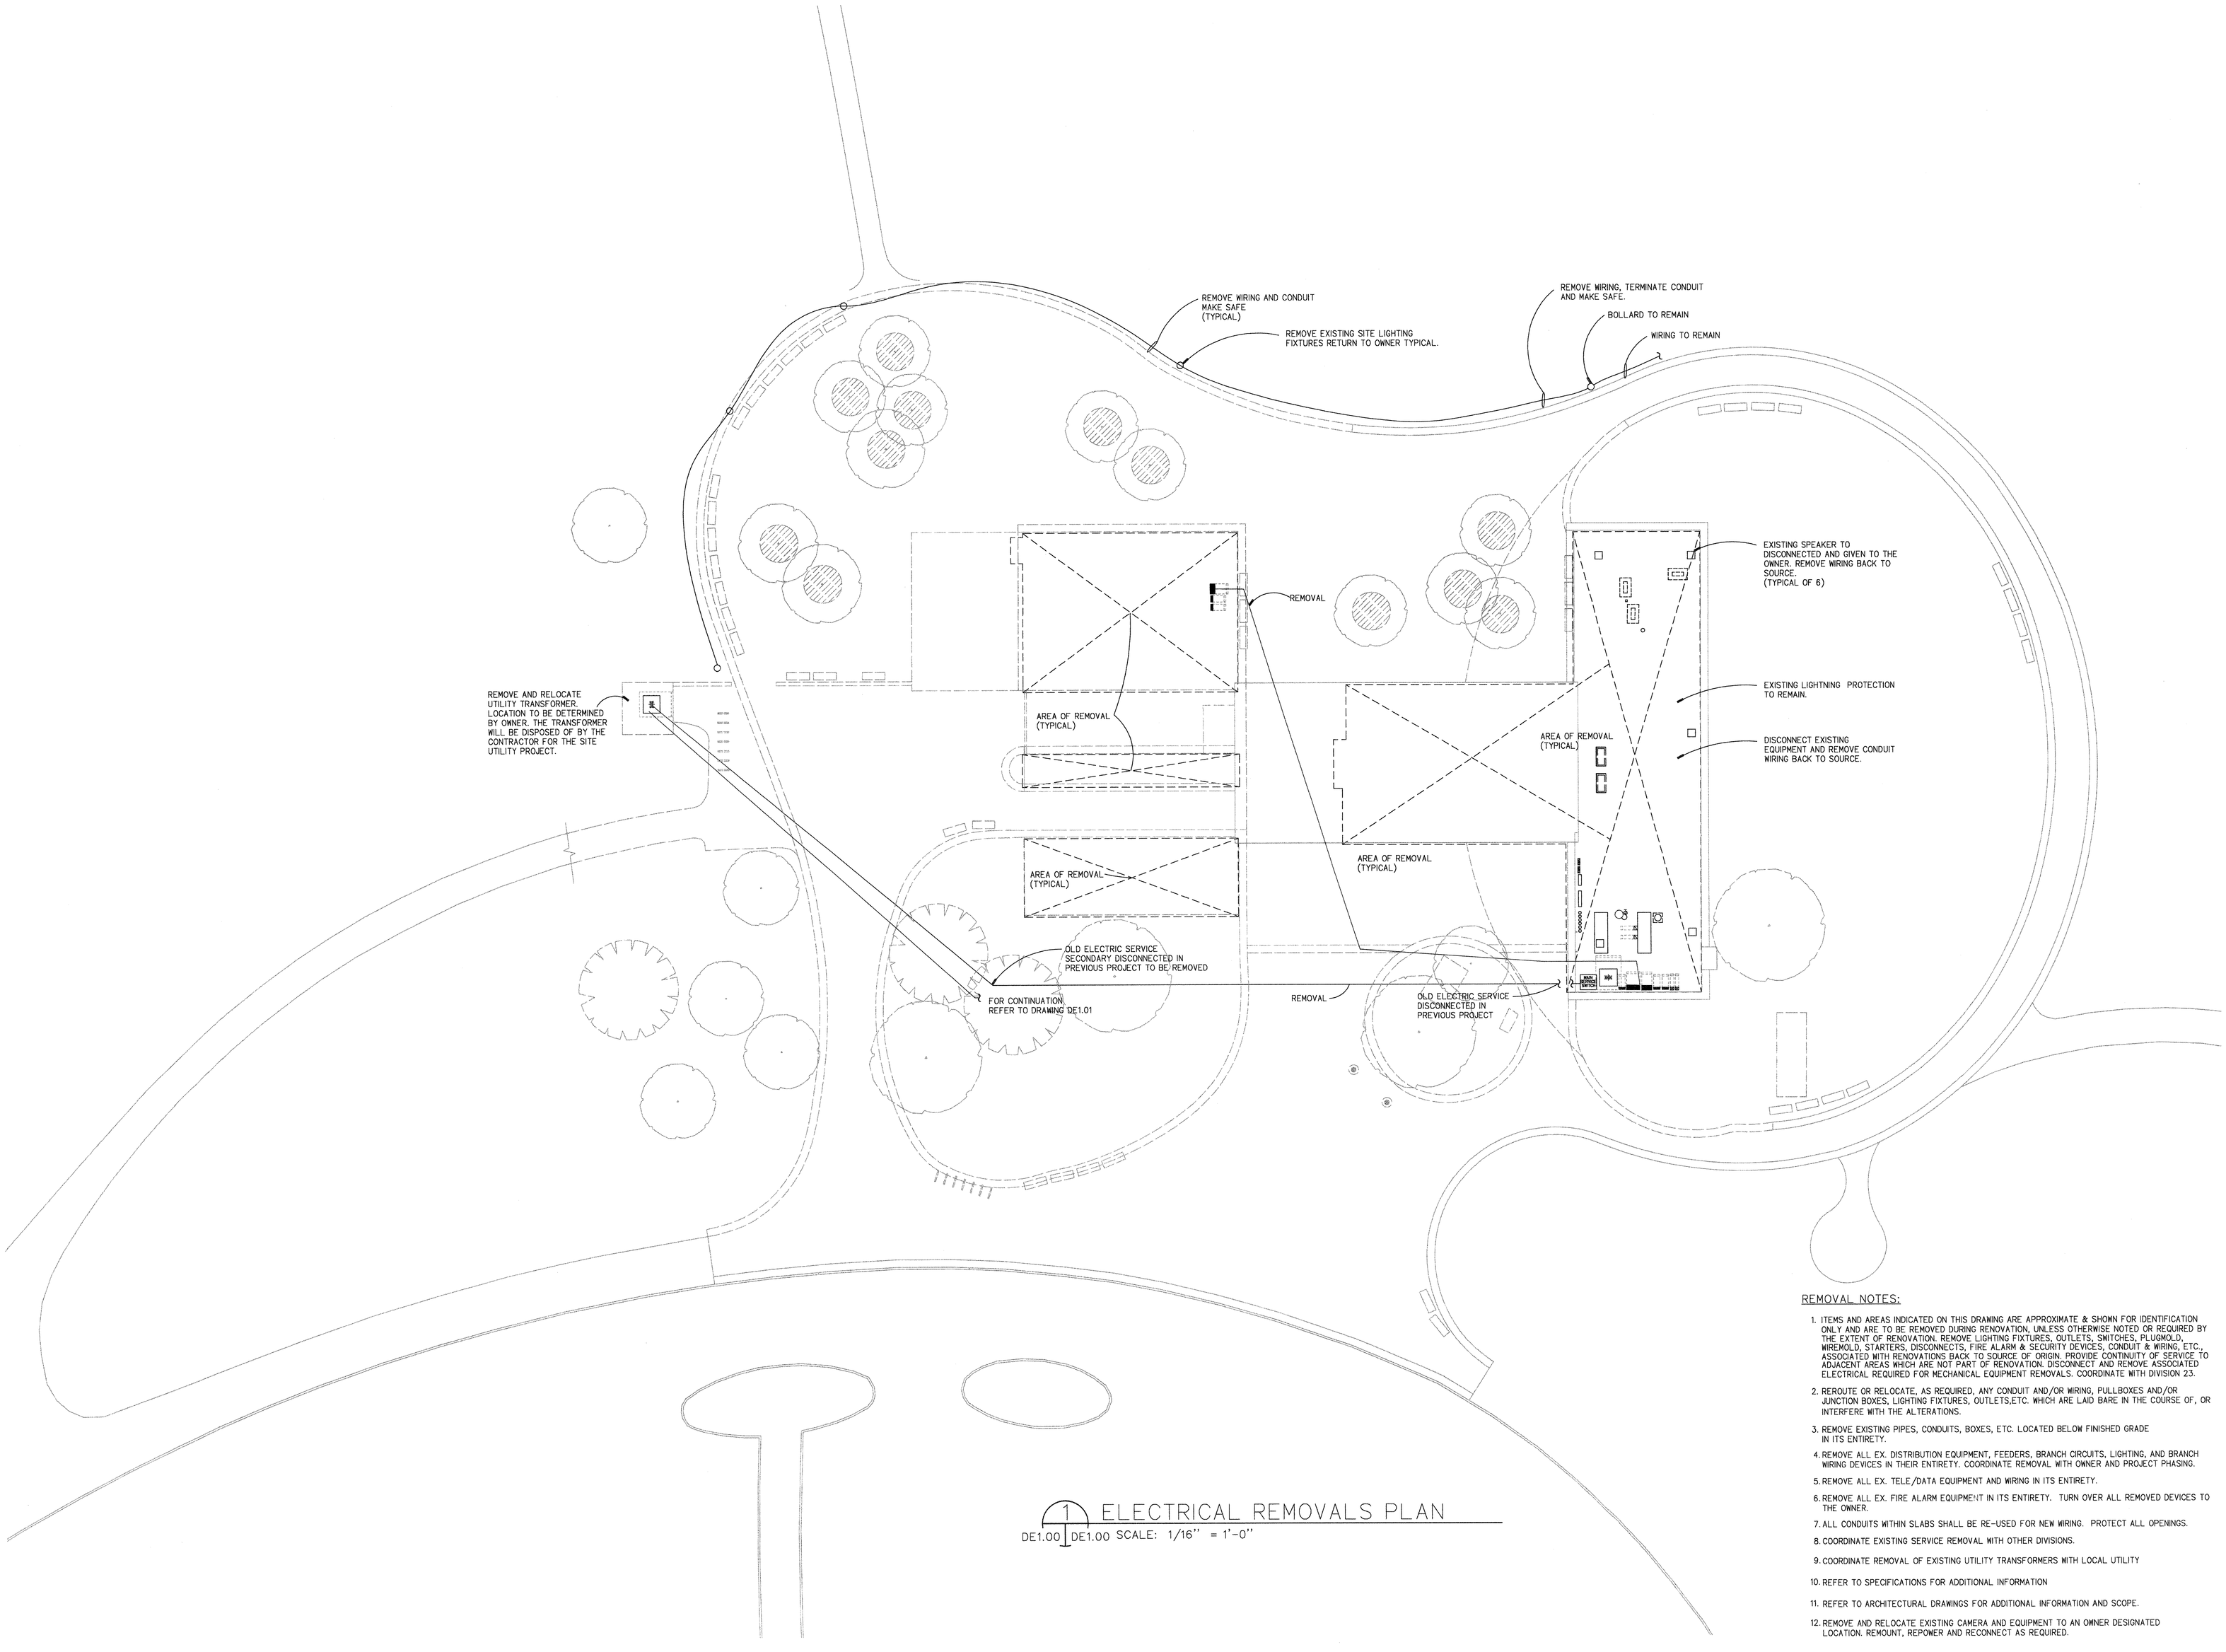

1 ELECTRICAL REMOVALS PLAN
DE1.00 DE1.00 SCALE: 1/16" = 1'-0"

REMOVAL NOTES:

1. ITEMS AND AREAS INDICATED ON THIS DRAWING ARE APPROXIMATE & SHOWN FOR IDENTIFICATION ONLY AND ARE TO BE REMOVED DURING RENOVATION, UNLESS OTHERWISE NOTED OR REQUIRED BY THE EXTENT OF RENOVATION. REMOVE LIGHTING FIXTURES, OUTLETS, SWITCHES, PLUGMOLD, WIREMOLD, STARTERS, DISCONNECTS, FIRE ALARM & SECURITY DEVICES, CONDUIT & WIRING, ETC., ASSOCIATED WITH RENOVATIONS BACK TO SOURCE OF ORIGIN. PROVIDE CONTINUITY OF SERVICE TO ADJACENT AREAS WHICH ARE NOT PART OF RENOVATION. DISCONNECT AND REMOVE ASSOCIATED ELECTRICAL REQUIRED FOR MECHANICAL EQUIPMENT REMOVALS. COORDINATE WITH DIVISION 23.
2. REROUTE OR RELOCATE, AS REQUIRED, ANY CONDUIT AND/OR WIRING, PULLBOXES AND/OR JUNCTION BOXES, LIGHTING FIXTURES, OUTLETS,ETC. WHICH ARE LAID BARE IN THE COURSE OF, OR INTERFERE WITH THE ALTERATIONS.
3. REMOVE EXISTING PIPES, CONDUITS, BOXES, ETC. LOCATED BELOW FINISHED GRADE IN ITS ENTIRETY.
4. REMOVE ALL EX. DISTRIBUTION EQUIPMENT, FEEDERS, BRANCH CIRCUITS, LIGHTING, AND BRANCH WIRING DEVICES IN THEIR ENTIRETY. COORDINATE REMOVAL WITH OWNER AND PROJECT PHASING.
5. REMOVE ALL EX. TELE/DATA EQUIPMENT AND WIRING IN ITS ENTIRETY.
6. REMOVE ALL EX. FIRE ALARM EQUIPMENT IN ITS ENTIRETY. TURN OVER ALL REMOVED DEVICES TO THE OWNER.
7. ALL CONDUITS WITHIN SLABS SHALL BE RE-USED FOR NEW WIRING. PROTECT ALL OPENINGS.
8. COORDINATE EXISTING SERVICE REMOVAL WITH OTHER DIVISIONS.
9. COORDINATE REMOVAL OF EXISTING UTILITY TRANSFORMERS WITH LOCAL UTILITY
10. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION
11. REFER TO ARCHITECTURAL DRAWINGS FOR ADDITIONAL INFORMATION AND SCOPE.
12. REMOVE AND RELOCATE EXISTING CAMERA AND EQUIPMENT TO AN OWNER DESIGNATED LOCATION. REMOUNT, REPOWER AND RECONNECT AS REQUIRED.

VERSIONS

No.	Date	Description
	10-03-2011	BID DOCUMENTS

AltieriSeborWieber LLC
Consulting Engineers
31 Knight Street, Norwalk, Connecticut 06851
ph: 203-866-5538 fx: 203-866-5243

ikon.5 architects
Architecture
Planning
Research
Strategy

864 Mapleton Road
Princeton, NJ 08540
609.919.0099
fax 609.919.0088
www.ikon5architects.com

Professional License Number

PROJECT TITLE:

VISITOR'S CENTER RENOVATION AND EXPANSION

MONMOUTH BATTLEFIELD STATE PARK

MANALAPAN, NEW JERSEY

PROJECT NO.: P1035-00

SHEET TITLE:

ELECTRICAL REMOVALS PLAN

DATE: 10-03-2011

DRAWN BY: AK

DRAWING NO.:

DE1.00